





MOTOR SLIDES

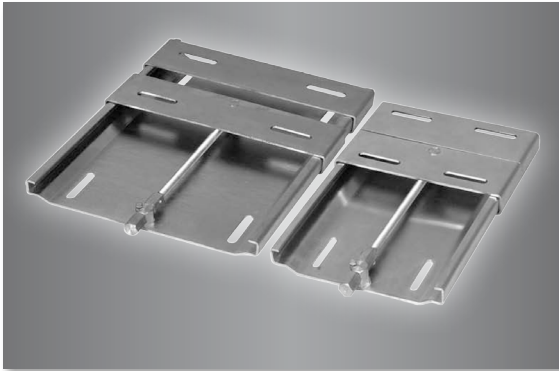

Manufactured in galvanized steel. The treatment is done after folding to get an optimum anti-corrosion protection.

Easy and fast assembly. These slides allow change of belts without disassembling the motor.

Easy adjustment of belt tension thanks to the adjusting screw (use of a standard key)

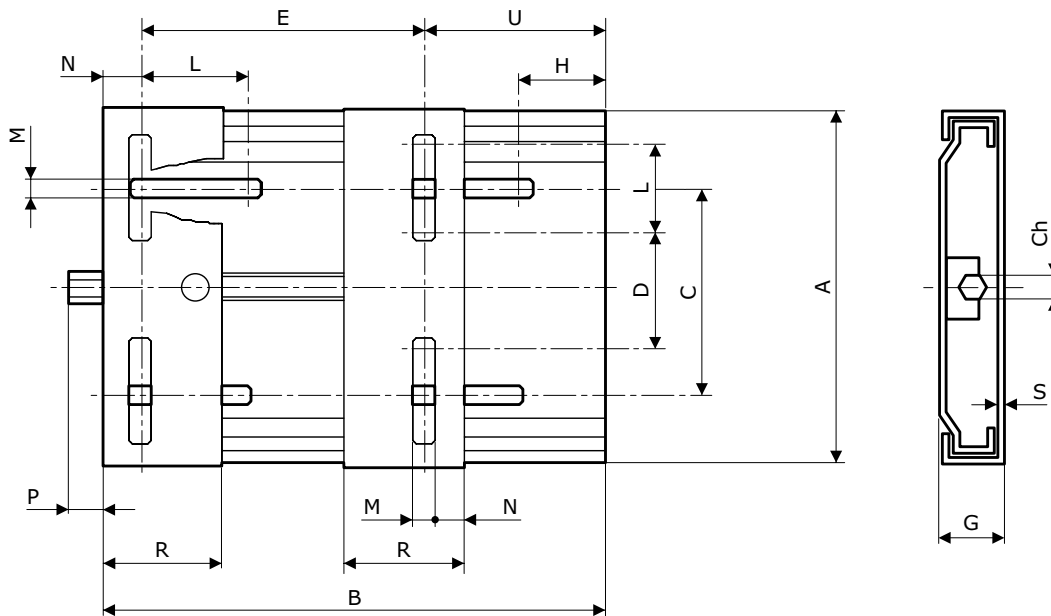

Reference	A	B	C	D	E	G	H	L	M	N	P	R	S	U	Ch	Motor Dimension
GM00210	195	210	98	43	100	34	25	50	10,5	20	38	70	3	90	19	63 / 80
GM00270	195	270	98	43	100	33	25	50	10,5	20	38	70	3	150	19	63 / 112
GM00307	213	307	108	65	100	35	30	50	10,5	20	42	70	3	175	19	90 / 112
GM00340	280	340	165	90	135	40	30	62	12,5	27	26	95	4	180	22	90 / 132
GM00430	285	430	165	90	132	40	29	62	12,5	27	30	95	4	271	22	90 / 160
GM00490	410	490	284	193	114	40	30	60	15,0	40	24	95	4	336	22	160 / 180