




## POLYETHYLENE SLIDING BLOCKS - TYPE OVR ACCESSORIES



Elliptical sliding block OVR in polyethylene with a high molecular density, suitable to tension simplex, duplex or triplex chains which have a speed below 0.35 m/s and operating temperatures lower than 80°C.

This type of sliding block is particular suitable for installations close to the sprocket and for reduced center distance. Its particular shape allows its use on both sides, granting a lifetime which is double compared to a traditional block.

The kits are supplied complete with galvanized steel screws and bolts (kit with stainless steel screws and bolts also possible).

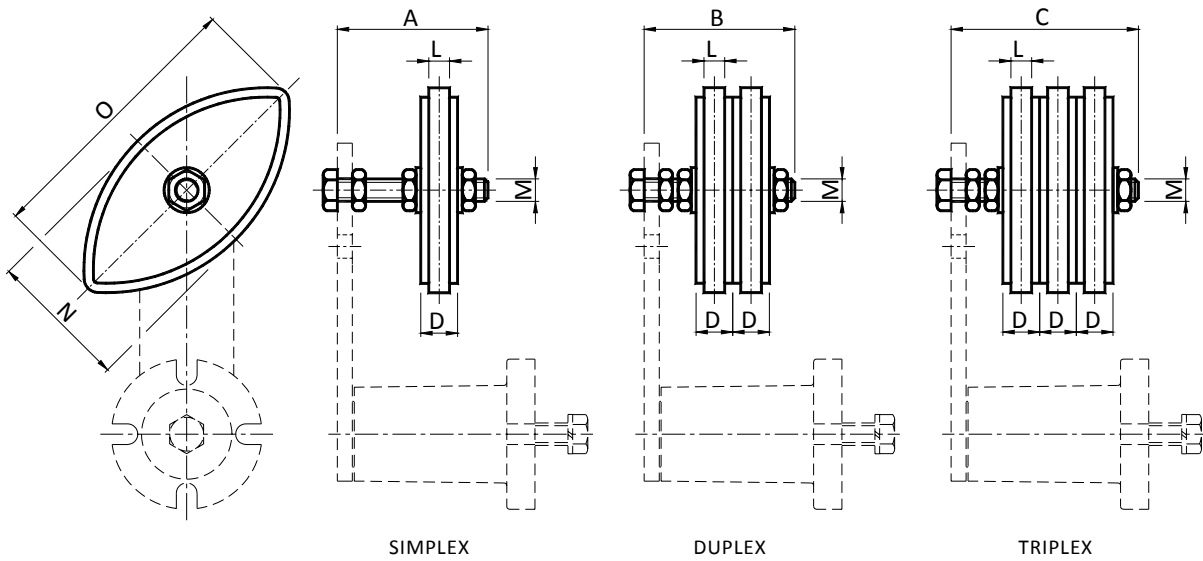

For duplex chains, use two blocks side by side.  
For triplex chains, use 3 blocks side by side.

Simplex chain reference (S)	Duplex chain reference (D)	Triplex chain reference (T)	Chains	Size	A	B	C	D	L	M	N	O	Kg	
													S	T
OVR 06B1 BT 11	OVR 06B2 BT11		3/8" x 7/32"	11	45	45		10,2	5	M 8	40	75	0,09	0,10
		OVR 06B3 BT15	3/8" x 7/32"	15			55	10,2	5	M10	40	75		0,11
OVR 08B1 BT15	OVR 08B2 BT15		1/2" x 5/16"	15	55	55		13,9	7	M10	50	96	0,10	0,11
OVR 08B1 BT18	OVR 08B2 BT18	OVR 08B3 BT18	1/2" x 5/16"	18	55	60	75	13,9	7	M10	50	96	0,11	0,12 0,13
OVR 10B1 BT18	OVR 10B2 BT18		5/8" x 3/8"	18	55	70		16,6	9	M10	65	126	0,12	0,14
		OVR 10B3 BT27	5/8" x 3/8"	27			90	16,6	9	M12	65	126		0,16
OVR 12B1 BT18	OVR 12B2 BT18		3/4" x 7/16"	18	60	70		19,5	11	M10	74	148	0,13	0,15
OVR 12B1 BT27	OVR 12B2 BT27	OVR 12B3 BT27	3/4" x 7/16"	27	80	80	100	19,5	11	M12	74	148	0,20	0,22 0,25