




















## KEILRIEMENSCHLEIBEN FÜR KLEMMBUCHSEN SPC

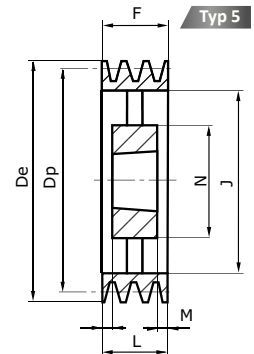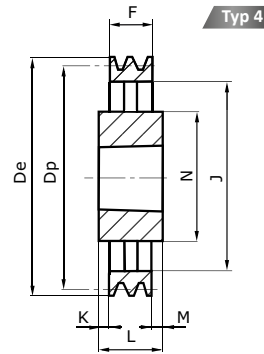

Riemenquerschnitt	a mm	b mm
Z	10	6
SPZ	9,7	8
XPZ	9	8
A	13	8
SPA	12,7	10
XPA	11,5	9
B	17	11
SPB	16,3	13
XPB	15,3	13
C	22	14
SPC	22	18
XPC	22	17

SPC												
Art. Nr.	Dp	De	Z	Buchse	E	F	J	K	L	M	N	Typ
SPC560/3MA			3	3535	-	85	504	2	89	2	175	4
SPC560/4MA			4	4040	-	111	504	4,5	102	4,5	210	5
SPC560/5MA	560	569,6	5	4545	-	136	504	11	114	11	242	5
SPC560/6MA			6	5050	-	162	504	17,5	127	17,5	267	5
SPC560/8MA			8	5050	-	213	504	43	127	43	267	5
SPC560/10MA			10	5050	-	264	504	68,5	127	68,5	267	5
SPC630/3MA			3	3535	-	85	574	8,5	102	8,5	210	4
SPC630/4MA			4	4545	-	111	574	1,5	114	1,5	242	4
SPC630/5MA	630	639,6	5	5050	-	136	574	4,5	127	4,5	267	5
SPC630/6MA			6	5050	-	162	574	17,5	127	17,5	267	5
SPC630/8MA			8	5050	-	213	574	43	127	43	267	5
SPC630/10MA			10	5050	-	264	574	68,5	127	68,5	267	5
SPC710/4MA			4	5050	-	111	654	8	127	8	267	4
SPC710/5MA			5	5050	-	136	654	4,5	127	4,5	267	5
SPC710/6MA	710	719,6	6	5050	-	162	654	17,5	127	17,5	267	5
SPC710/8MA			8	5050	-	213	654	43	127	43	267	5
SPC710/10MA			10	5050	-	264	654	68,5	127	68,5	267	5
SPC800/3MA			3	4545	-	85	737	14,5	114	14,5	242	4
SPC800/4MA			4	5050	-	111	737	8	127	8	267	4
SPC800/5MA	800	809,6	5	5050	-	136	737	4,5	127	4,5	267	5
SPC800/6MA			6	5050	-	162	737	17,5	127	17,5	267	5
SPC800/8MA			8	5050	-	213	737	43	127	43	267	5
SPC800/10MA			10	5050	-	264	737	68,5	127	68,5	267	5
SPC1000/3MA			3	5050	-	85	937	21	127	21	267	4
SPC1000/4MA			4	5050	-	111	937	8	127	8	267	4
SPC1000/5MA	1000	1009,6	5	5050	-	136	937	4,5	127	4,5	267	5
SPC1000/6MA			6	5050	-	162	937	17,5	127	17,5	267	5
SPC1000/8MA			8	5050	-	213	937	43	127	43	267	5
SPC1000/10MA			10	5050	-	264	937	68,5	127	68,5	267	5
SPC1250/3MA			3	5050	-	85	1187	21	127	21	267	4
SPC1250/4MA			4	5050	-	111	1187	8	127	8	267	4
SPC1250/5MA	1250	1259,6	5	5050	-	136	1187	4,5	127	4,5	267	5
SPC1250/6MA			6	5050	-	162	1187	17,5	127	17,5	267	5
SPC1250/8MA			8	5050	-	213	1187	43	127	43	267	5
SPC1250/10MA			10	5050	-	264	1187	68,5	127	68,5	267	5

Z = Anzahl der Rillen

Alle unsere Riemenscheiben mit Vollnaben und für Klemmbuchse werden gemäß den Normen ISO 4183 und DIN 2211 hergestellt.

Material: Guss EN-GJL-250 UNI EN 1561 + Phosphorierung Statisch ausgewuchtete Riemenscheiben, maximale Geschwindigkeit 30 m/Sekunde.