


SPIKE PLATE CHAINS - Derived from ISO 606

APPLICATIONS

These chains are generally used in the wood industry. e.g. conveying wood planks.

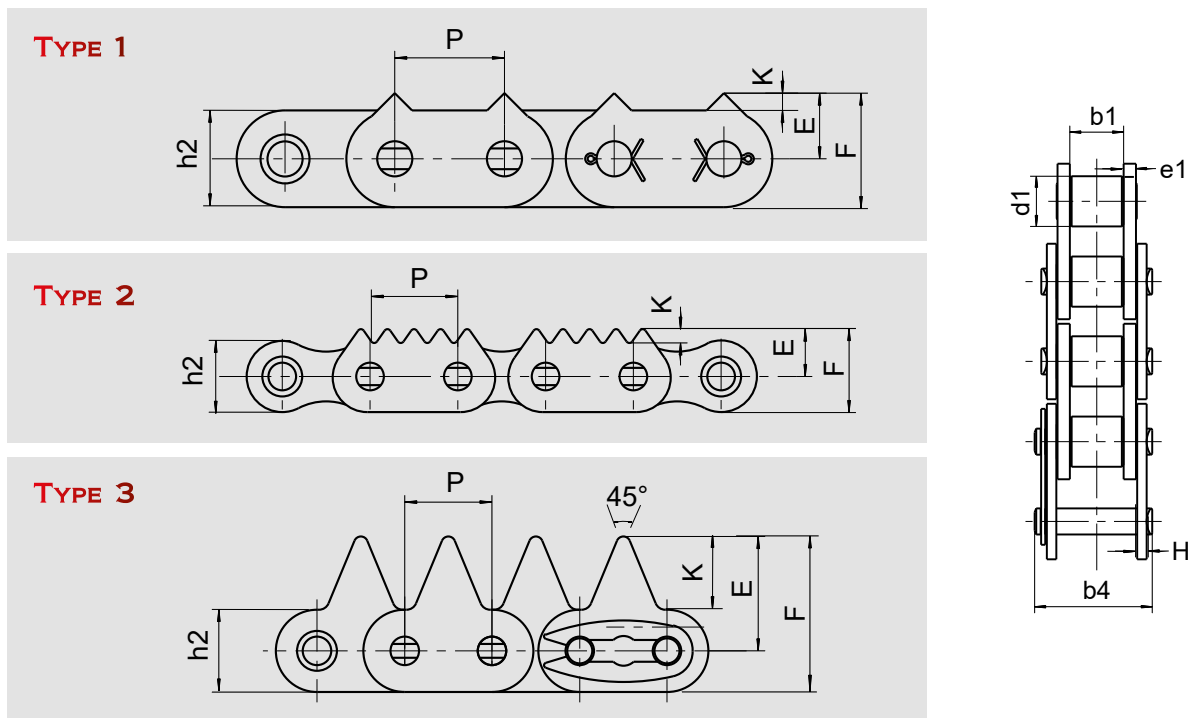

Dimensions in mm

References		Pitch <i>P</i>	SEDIS RANGES			Spike type	<i>d1</i> max.	<i>b1</i> min.	<i>b4</i> max.	<i>e1</i>	<i>h2</i>	<i>E</i>	<i>H</i>	<i>I</i>	<i>K</i>	Minimum Breaking load kN
ISO 606	SEDIS		ALPHA Premium	DELTA® HR	DELTA TITANIUM 2											
16 B-1	15T	25,4	x	x	x	2	15,88	17,02	35,1	3,9	20,6	13,7	3,0	24,0	4	66
16 B-1	15T	25,4	x	x	x	3	15,88	17,02	35,1	3,9	23,8	33,3	3,0	45,2	21,4	66
20 B-1	17T	31,75	x	x	x	1	19,05	19,56	40,5	4,5	28,0	19,0	3,5	33,0	5	105

- In duplex and triplex chain for 15T (16B-1) and 17T (20B-1): consult us.

Many other versions possible. Do not hesitate to consult our specific Wood Industry brochure for more details.