
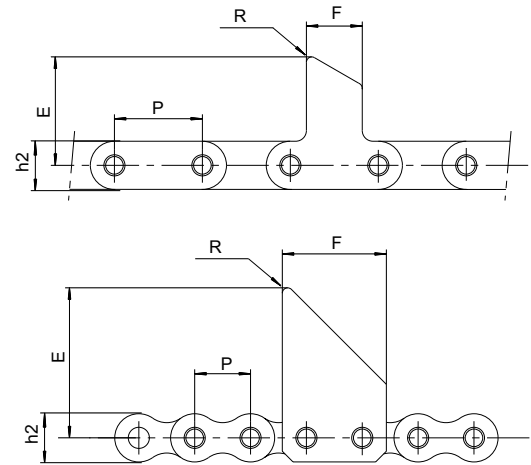


CATENE CON SPINTORI

ESEMPI DI FABBRICAZIONI

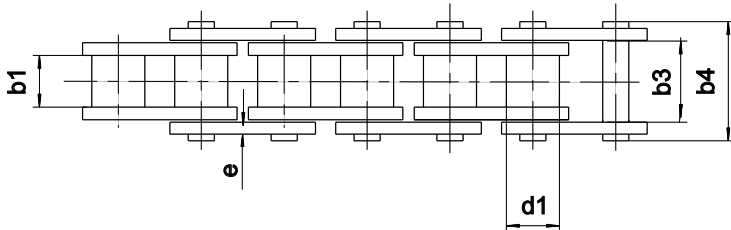

Dimensioni in mm


Riferimento SEDIS	P	d1	b1	b3	b4	h2	e	E	F	R	Resistenza minima alla trazione
		max.	min.	min.	max.	max.	med.	max.	max.		kN
Piastre dritte											
5310-04	63,5	25,40	25,33	38,05	53,1	32,0	5	76	50	4	180
5310-05	63,5	25,40	25,33	38,05	53,1	32,0	5	134	50	4	180
Piastre sagomate											
17T	31,75	19,05	19,56	29,15	40,5	25,4	3,5	82	58	3	105
18T	38,1	25,40	25,4	38,05	53,1	32,3	5	76	75	4	180

Le versioni DELTA®, DELTA® TITANIUM 2 e DELTA® VERTE sono possibili.


Tutte le forme e dimensioni realizzabili. Consultateci.

CATENE A PINZE


TIPO 1

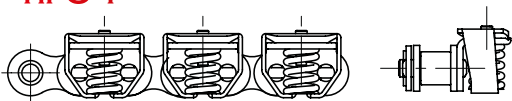


A PINZE DIRITTE




A PINZE A CUORE



TIPO 2



TIPO 3

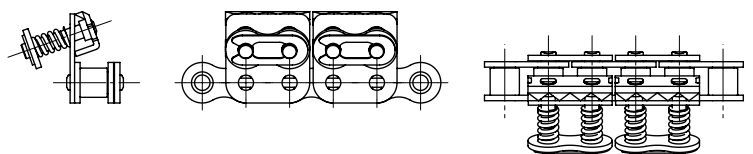

- Molle con varie resistenze (50N - 100N)
- Pinze inox con varie forme possibili (a cuore o diritte)
- Catena Delta® Titanium 2 o nichelata
- Passo 12,7mm e de 5,875mm

Ampia gamma di catene a pinze. Consultateci.